


Parking Numbers	
Total Car Parking Spaces =	324
Including:	
DDA Parking =	28
EV Charging Bays =	54
Motorcycle =	8
Caravan =	10
Coach =	8
HGV =	39
Delivery Bays =	2
Abnormal Load =	1

Key

- Phase 2 Site Boundary
Site Area 36,110.26sqm / 8.92acres
- Bitmac road finish
- Bitmac path finish
- Concrete pavements
- Concrete
- Concrete Apron
- Concrete Apron
Double reinforced concrete to delivery stand
- Kerb
- Pin Kerb
- Trieb Kerb
- DK
Drop Kerb
- Stainless steel bollard
- Removed / Demolished
- Tactile paving
- 0.6m high Timber Knee Rail
- 1.2m high Timber Post and Rail Fence
- 2m high Timber Close Boarded Screen Fence
- 2m high Timber Acoustic Fence
- Non illuminated signage
- Non illuminated sign
NO ENTRY / GIVE WAY
- Pedestrian Route
Tactile paving and dropped kerbs at all appropriate points along the route to DDA standards within site demise

0m 10 20 30 40 50
Scale Bar

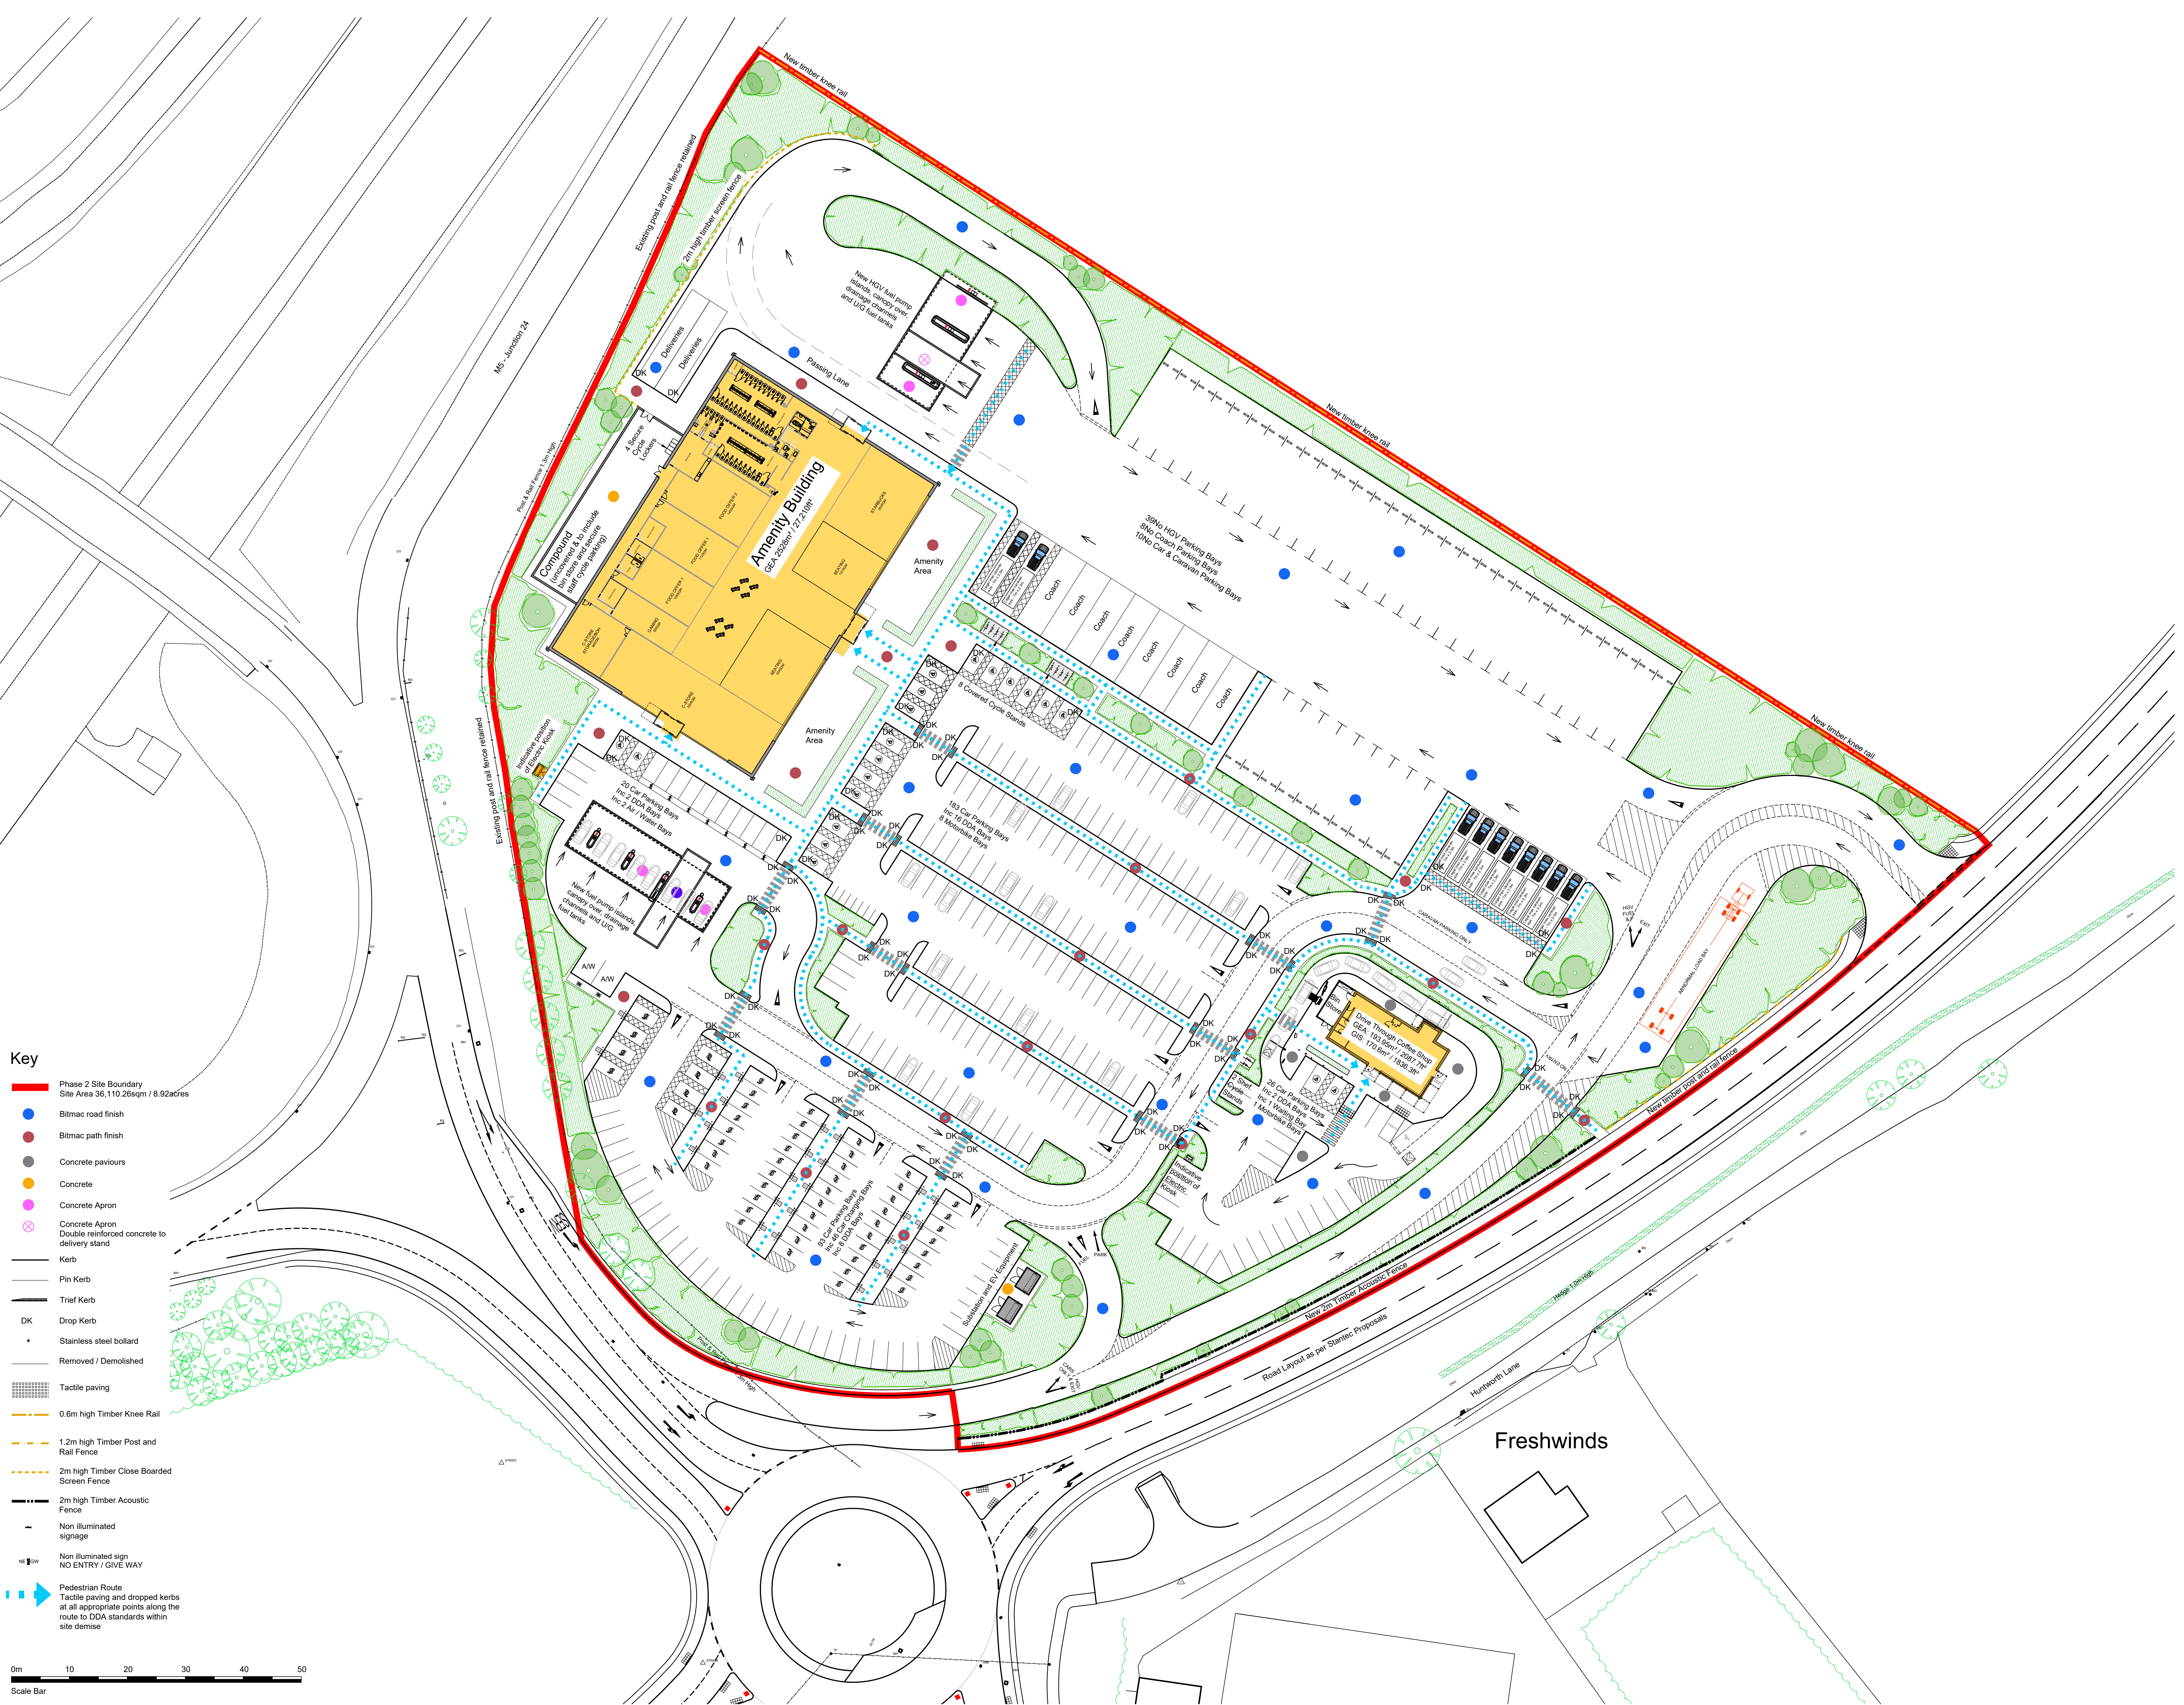

A	06.11.24 MINOR AMENDMENTS
REVISIONS	
CLIENT	WELCOME BREAK
PROJECT	BRIDGWATER EAST SERVICES, J24, M5 TAT 0AH
TITLE	PROPOSED SITE LAYOUT
DATE	30.10.24
SCALE	1:500 @ A1
JOB ID	1516
DWG	62a